




# WEARMASTER® Dock Seal System

## Product Specifications

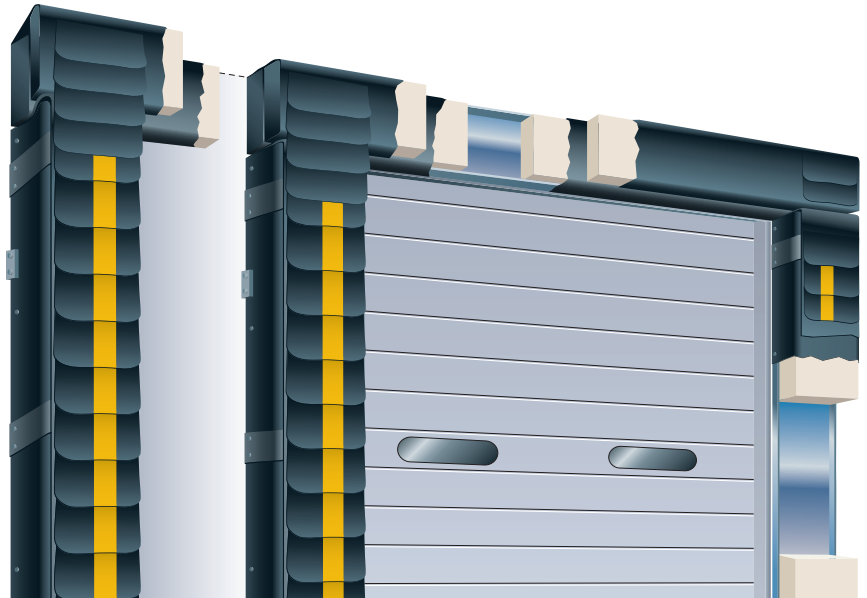

### DESIGN HIGHLIGHTS

- Two-piece head pad system with sliding front pad increases wearability
- Roll-formed galvanized steel framing reduces pressure on building wall
- Full-width durable head pad wear face included on the mobile head pad portion
- Head pad mounted firmly to steel framing with TEK screws inserted through heavy-duty washers
- 4" exposure wear pleating moves with trailer, extending fabric life in key wear areas
- Reinforced TEK screws provide firm attachment of the sliding wear pleat system to side pads
- Sliding wear pleat system and front head pad are easily replaced without dock seal removal
- Strong urethane-coated base material provides good sliding surface for mobility of wear surfaces

### APPLICATION DATA

Door width: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Door height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Dock height: \_\_\_\_\_ ft. \_\_\_\_\_ in.

Bumper protection\*: \_\_\_\_\_ in.

(\*Includes bumper projection and any building wall/foundation offset or cantilever)

### TRUCKS AND TRAILERS SERVICED

Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min.

Hydraulic tailgate:  Yes  No

Rear step section:  Yes  No

Tailgate/step section size: \_\_\_\_\_ in

Yard jockeys:  Yes  No

### PROJECT INFORMATION

JOB NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

GENERAL CONTRACTOR \_\_\_\_\_

DISTRIBUTOR \_\_\_\_\_

QUANTITY \_\_\_\_\_



### CERTIFIED FOR CONSTRUCTION

BY \_\_\_\_\_

COMPANY \_\_\_\_\_

ADDRESS \_\_\_\_\_

DATE \_\_\_\_\_

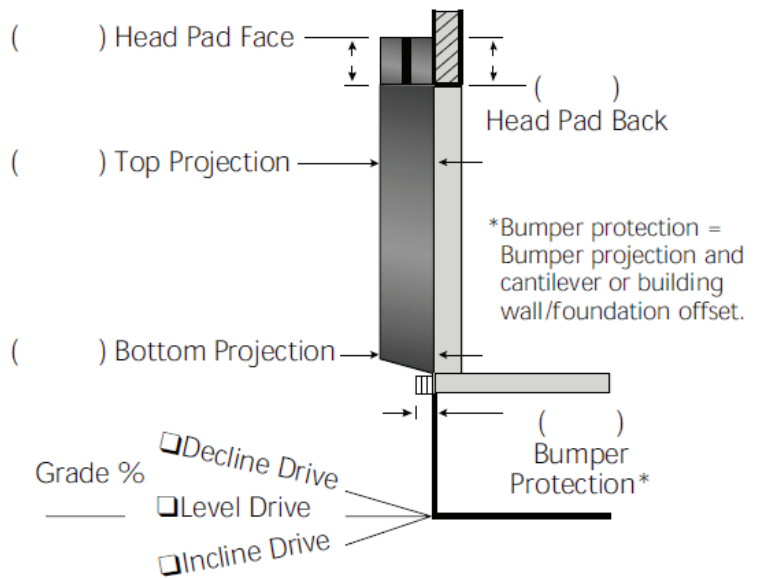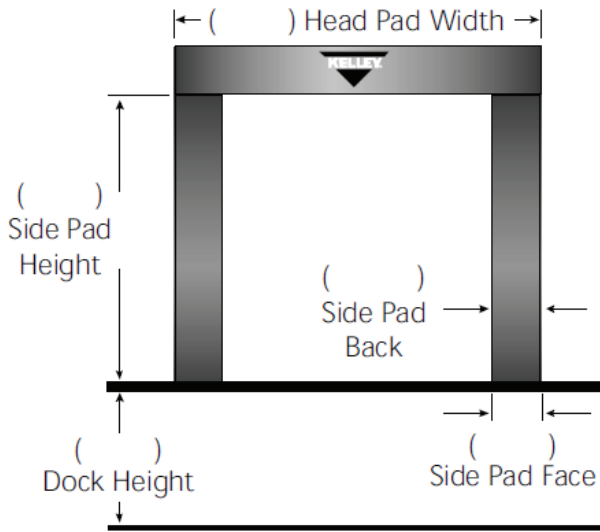

Quantity \_\_\_\_\_ Model:  WM  Flame retardant fabric & foam  Flame retardant fabric only

Framing: Roll formed galvanized steel

Head Pad Width: \_\_\_\_\_ (Total inches) Head Pad Bevel:  12/12  18/18  12/15  12/18

Drop Curtain:  None  12"  Hook-Loop

Side Pad Height: \_\_\_\_\_ (Total inches)

Side Pad Bevel:  12/12  6/10  8/12  10/12  10/15  8/15  12/15  10/18  6/14

Base Material:  22 oz. black vinyl

Taper:  Tapered  Non-Tapered

Top Projection:  10"  12"  14"  16"  18"  20"  22"

Bottom Projection:  10"  12"  14"  16"  18"  20"  22"

Bottom Flaps: (3" Inside bottom flaps are standard)  6"  Inside  Inside & front  All 3 sides

Wear Surface: Full width black TS-55® is standard on the head pad front chamber

Reinforced inside face  Side pad 4"  Side pad full height

Material:  40 oz. vinyl  TS-55®

Color:  Black  Tan  Brown  Blue  Green

Wear Pleats: Black TS-55® 4" Exposure is standard on the side pads and head pad corners

Options:  Door numbers

Side Pad Mounting Brackets:  None  Flats & angles  Angles  1 1/2" Offset flats & angles



**Kelley**  
 1612 Hutton Drive, Suite 140  
 Carrollton, TX 75006  
 800.558.6960  
 www.kelleydockolutions.com

4Front Engineered Solutions reserves the right to change specifications and designs without notice and without incurring obligations. 4Front Engineered Solutions products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Kelley as word and logo are registered trademarks belonging to ASSA ABLLOY Entrance Systems AB or other companies controlled by the same organization. All rights reserved.